


Polar Bear *Plus*

SPECIFICATIONS AND DATA SHEET

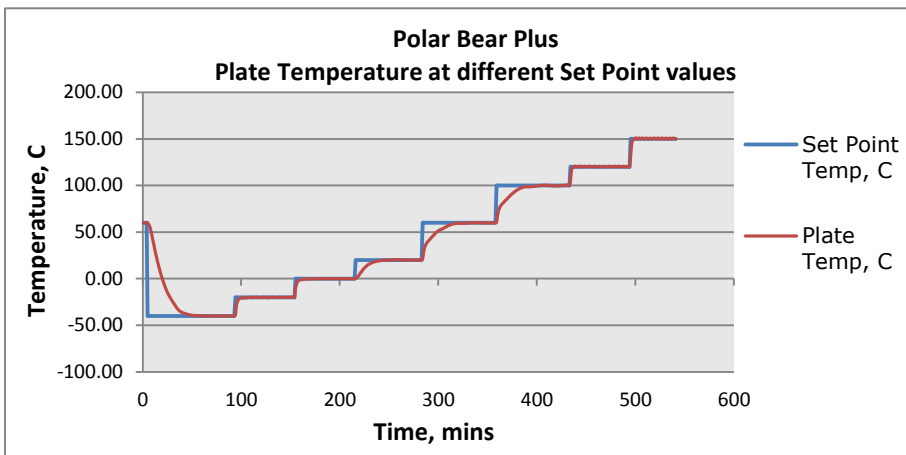

GENERAL		
Plate diameter	mm	149
Dimensions (W x D x H)	mm	200 x 320 x 170
Weight	kg	9
Temperature range	°C	-40 to 150
Accuracy	°C	better than ± 1.0
Control accuracy with external sensor (PT100) in former at 0 °C	°C	±0.10
Safety circuit min. (software)	°C	-50
Safety circuit max. (thermal fuse)	°C	160
Power input	W	630
STIRRING		
Stirring quantity max (H ₂ O)	L	1
Speed range	rpm	0, 200 - 1500
Stirring bar max length	mm	50
HEATING AND COOLING*		
Heating time from 20°C to 100°C	min	10
Cooling time from 20°C to 0°C	min	7
Cooling time from 20°C to -20°C	min	14
Cooling time from 20°C to -40°C	min	23

CONNECTIVITY		
Ethernet interface		Yes
USB data storage		Yes
Real time historical log		Yes
ENVIRONMENT		
Permissible ambient temperature	°C	5 - 40
Permissible relative moisture		No data
Protection class according to DIN EN 60529		IP20

Gisa Meissner,
from the
Department of
Chemistry,
University of
Cambridge

Photographer:
Ina Dimireva



*Based on plate temperatures.

CAMBRIDGE REACTOR DESIGN

Unit D2 Brookfield Business Centre, Cottenham, CB24 8PS, Cambs, UK

W www.CambridgeReactorDesign.com

E info@crduk.com

T +44 (0)1954 25-25-22

F +44 (0)1954 25-25-66